

XTREMEPRO | 6mm

The best **on-premise message center** on the market.

Features a borderless design to maximize allowed square footage and universal module that makes installs, retrofits, and upgrades a breeze.



Highest Refresh Rate

281 trillion colors
60 Frames Per Second
Up to 700K pixels



Easiest EMC Software

Studio Cloud from any device
Full edit from your phone



Highest Quality

Highest Quality LED's mean long lasting better looking content



Easily display videos, pictures, or text with the best value in the business. With **7,000 NITS** of brightness and border less design, 6mm ThinkSIGN EMC's are crisp and sharp as close as 18 feet away. Instantly message your target audience where it matters.

most popular sizes

matrix	dimension
96 x 288	2'1.1" x 6'3.5" x 7"
96 x 336	2'1.1" x 7'4.1" x 7"
96 x 384	2'1.1" x 8'4.7" x 7"
144 x 288	3'1.7" x 6'3.5" x 7"
144 x 336	3'1.7" x 7'4" x 7"
144 x 384	3'1.7" x 8'4.7" x 7"
192 x 336	4'2.3" x 7'4.1" x 7"
192 x 384	4'2.3" x 8'4.7" x 7"



Resolution Matters!



ThinkSIGN's 6mm borderless Xtreme Pro, when compared to other brands, maximizes your allowable square footage resulting in MORE pixels and resolution.

3 x 8 VIEWING AREA COMPARISON

ThinkSIGN

Competitor A

Competitor B

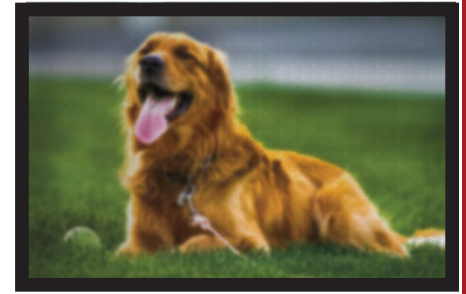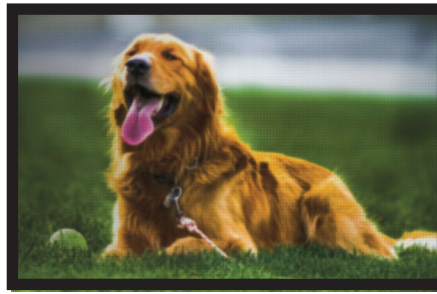


144 x 384 pixel matrix
55,296 pixels
Full Resolution
25.4 SQ. FT ACTIVE

144 x 384 pixel matrix
55,296 pixels
Same as ThinkSIGN
24 SQ. FT ACTIVE

120 x 360 pixel matrix
43,200 pixels
-22% less resolution
21 SQ. FT ACTIVE

6mm Resolution Module  

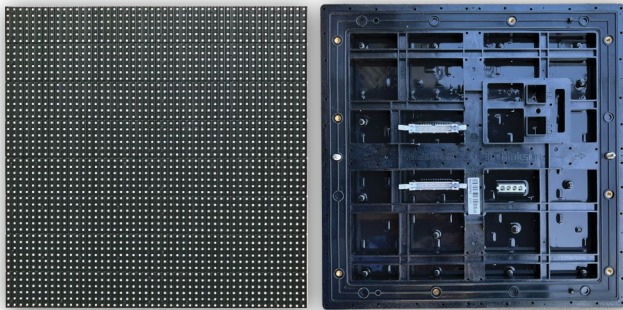

sign specifications

6mm

- Pixel Pitch: 6mm
- Pixel Configuration: SMD 3 in 1
- Module Dimensions: 1.05' x 1.05'
- Matrix Configurations: 48 x 48 pixels
- LED lifetime: 100,000 hours
- Color Capability: 281 trillion
- Viewing Angle: 170 x 170
- Media Format: jpg . mp4 . bmp . png
- Brightness: 7,000 NITS
- Power: 120 volt single phase
- Communications: 4G • wireless • direct • fiber

Choosing the **Right Sign**



20mm



16mm



13mm



10mm



6mm

Increase in **Pixels**

+56%
more than 20mm

+45%
more than 16mm

+77%
more than 13mm

+125%
more than 10mm